


Single row inch size TRB

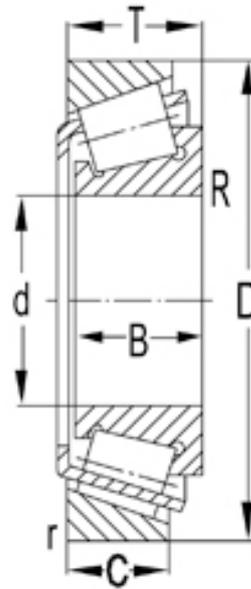

| select | Inquiry | Bearing No. | Boundary dimensions [mm] | | | Basic load ratings(kN) | | Pu | Limiting speed(rpm) | | Weight Kg |
|-----------------------|---------|-------------|--------------------------|------|------|------------------------|-------------|-------|----------------------|----------------|-----------|
| | | | d | D | T | Dynamic(Cr) | Static(Cor) | | Speed Ratings | Limiting Speed | |
| 03062/03162/Q | 15,875 | 41,275 | 14,288 | 25,5 | 21,2 | 2,16 | 15000 | 20000 | 0,090 | | |
| 11590/11520/Q | 15,875 | 42,862 | 14,288 | 17,6 | 17,6 | 1,83 | 12000 | 17000 | 0,10 | | |
| LM11749/710/Q | 17,462 | 39,878 | 13,843 | 24,5 | 20,8 | 2,12 | 15000 | 20000 | 0,081 | | |
| LM11749/710/QVC027 | 17,462 | 39,878 | 13,843 | 24,5 | 20,8 | 2,12 | 15000 | 20000 | 0,081 | | |
| LM11949/910/Q | 19,050 | 45,237 | 15,494 | 31,5 | 27,5 | 29 | 13000 | 18000 | 0,12 | | |
| 09067/09195/Q | 19,050 | 49,225 | 19,845 | 39,1 | 40 | 4,3 | 11000 | 17000 | 0,17 | | |
| 09074/09195/QVQ494 | 19,050 | 49,225 | 19,845 | 39,1 | 40 | 4,3 | 11000 | 17000 | 0,18 | | |
| LM12748/710 | 21,430 | 45,237 | 15,494 | 27,5 | 31 | 3,2 | 11000 | 17000 | 0,12 | | |
| M12649/610/Q | 21,430 | 50,005 | 17,526 | 42,5 | 38 | 4,15 | 12000 | 16000 | 0,17 | | |
| LM12749/710/Q | 21,986 | 45,237 | 15,494 | 31,5 | 31 | 3,2 | 12000 | 17000 | 0,12 | | |
| LM12749/711/Q | 21,986 | 45,974 | 15,494 | 31,5 | 31 | 3,2 | 12000 | 17000 | 0,12 | | |
| 1380/1328/Q | 22,225 | 52,388 | 19,368 | 48 | 44 | 4,8 | 11000 | 15000 | 0,20 | | |
| 07100S/07210X/Q | 25,400 | 50,800 | 15,011 | 32 | 30,5 | 3,15 | 11000 | 15000 | 0,13 | | |
| 15578/15520 | 25,400 | 57,150 | 17,462 | 40,2 | 45,5 | 4,9 | 9000 | 13000 | 0,23 | | |
| M84548/2/510/2/QVQ506 | 25,400 | 57,150 | 19,431 | 45,5 | 45 | 5 | 10000 | 13000 | 0,23 | | |
| 15101/15245 | 25,400 | 62 | 19,050 | 48,4 | 57 | 6,2 | 9500 | 14000 | 0,31 | | |
| 15103S/15243/Q | 26,157 | 61,912 | 19,050 | 56 | 57 | 6,2 | 9000 | 12000 | 0,29 | | |
| 15103S/15245/Q | 26,157 | 62 | 19,050 | 56 | 57 | 6,2 | 9000 | 12000 | 0,29 | | |
| L44649/610/Q | 26,988 | 50,292 | 14,224 | 30 | 30 | 3,05 | 11000 | 15000 | 0,11 | | |
| 1982F/1924A/QVQ519 | 27,500 | 57,150 | 19,845 | 52 | 51 | 5,6 | 10000 | 13000 | 0,22 | | |
| 1985/1922/Q | 28,575 | 57,150 | 19,845 | 54 | 55 | 6 | 10000 | 13000 | 0,22 | | |
| 1988/1922/Q | 28,575 | 57,150 | 19,845 | 47,3 | 55 | 6 | 9000 | 13000 | 0,22 | | |

Single row inch size TRB

| | | | | | | | | | |
|-----------------------|--------|--------|--------|------|------|------|-------|-------|------|
| M86647/610/QCL7C | 28,575 | 64,292 | 21,433 | 56 | 61 | 6,8 | 8500 | 11000 | 0,35 |
| 02872/02820/Q | 28,575 | 73,025 | 22,225 | 99 | 140 | 15 | 7000 | 10000 | 1,05 |
| L45449/410/Q | 29,000 | 50,292 | 14,224 | 30 | 32,5 | 3,35 | 11000 | 14000 | 0,11 |
| M86649/2/610/2/QVQ506 | 30,162 | 64,292 | 21,433 | 56 | 61 | 6,8 | 8500 | 11000 | 0,33 |
| M88043/010/2/QCL7C | 30,162 | 68,262 | 22,225 | 63 | 69,5 | 7,8 | 8000 | 11000 | 0,41 |
| 15123/15243/Q | 31,750 | 61,912 | 19,050 | 56 | 57 | 6,2 | 9000 | 12000 | 0,24 |
| 15123/15245/Q | 31,750 | 62 | 19,050 | 56 | 57 | 6,2 | 9000 | 12000 | 0,24 |
| HM88542/510/Q | 31,750 | 73,025 | 29,370 | 70,4 | 95 | 10,4 | 6700 | 10000 | 0,62 |